

Prof.(m)	N(colpi p)	Rpd(kg/cm ²)	asta	Prof.(m)	N(colpi p)	Rpd(kg/cm ²)	asta
0.00 - 0.10	2	7.8	1	2.30 - 2.40	12	42.2	3
0.10 - 0.20	14	54.3	1	2.40 - 2.50	13	45.7	3
0.20 - 0.30	22	85.3	1	2.50 - 2.60	13	45.7	3
0.30 - 0.40	28	108.6	1	2.60 - 2.70	16	56.3	3
0.40 - 0.50	29	112.5	1	2.70 - 2.80	15	52.7	3
0.50 - 0.60	24	93.1	1	2.80 - 2.90	25	87.9	3
0.60 - 0.70	23	89.2	1	2.90 - 3.00	43	144.4	4
0.70 - 0.80	38	147.4	1	3.00 - 3.10	18	60.4	4
0.80 - 0.90	28	108.6	1	3.10 - 3.20	14	47.0	4
0.90 - 1.00	19	70.1	2	3.20 - 3.30	14	47.0	4
1.00 - 1.10	23	84.8	2	3.30 - 3.40	19	63.8	4
1.10 - 1.20	23	84.8	2	3.40 - 3.50	13	43.7	4
1.20 - 1.30	15	55.3	2	3.50 - 3.60	12	40.3	4
1.30 - 1.40	15	55.3	2	3.60 - 3.70	16	53.7	4
1.40 - 1.50	16	59.0	2	3.70 - 3.80	22	73.9	4
1.50 - 1.60	15	55.3	2	3.80 - 3.90	35	117.5	4
1.60 - 1.70	17	62.7	2	3.90 - 4.00	41	131.8	5
1.70 - 1.80	17	62.7	2	4.00 - 4.10	25	80.4	5
1.80 - 1.90	16	59.0	2	4.10 - 4.20	21	67.5	5
1.90 - 2.00	14	49.2	3	4.20 - 4.30	20	64.3	5
2.00 - 2.10	15	52.7	3	4.30 - 4.40	35	112.5	5
2.10 - 2.20	14	49.2	3	4.40 - 4.50	60	192.9	5
2.20 - 2.30	13	45.7	3				


- PENETROMETRO DINAMICO tipo : **DL-30 (60°)**

- M (massa battente)= **30.00 kg** - H (altezza caduta)= **0.20 m** - A (area punta)= **10.00 cm²** - D(diam. punta)= **35.70 mm**

- Numero Colpi Punta N = **N(10)** [δ = 10 cm]

- Uso rivestimento / fanghi iniezione : **NO**

N = N(10) numero di colpi penetrazione punta - avanzamento $\delta = 10$

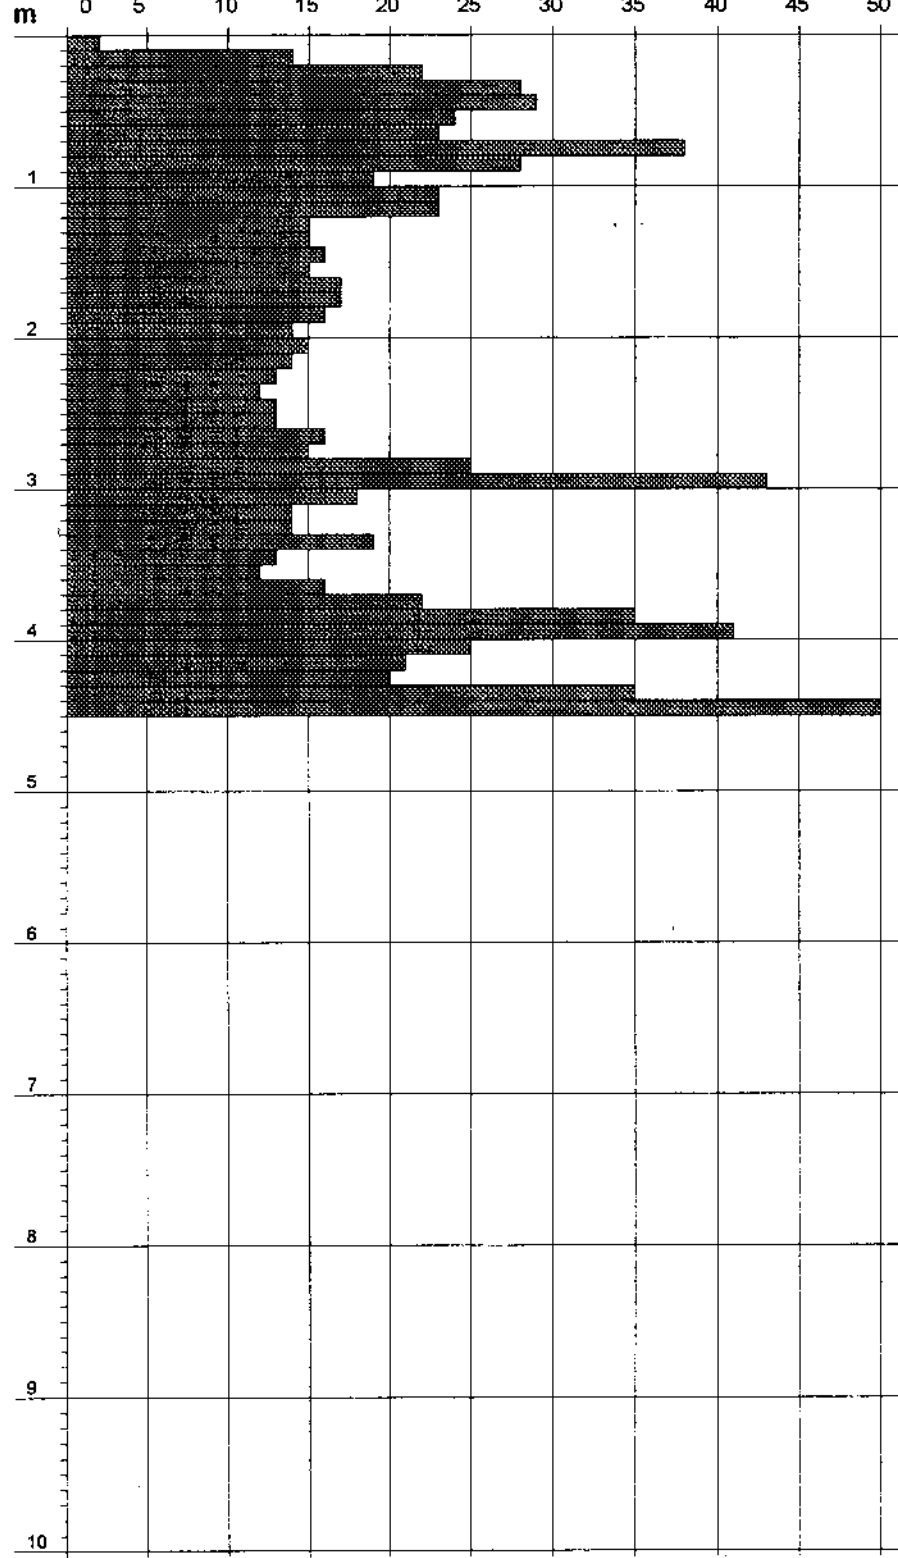

Rpd (kg/cm^2)

