


Prof. m	RP/10 kg/cm ²	RL/10 kg/cm ²	Qc kg/cm ²	fs kg/cm ²	Qc/fs	Prof. m	RP/10 kg/cm ²	RL/10 kg/cm ²	Qc kg/cm ²	fs kg/cm ²	Qc/fs
0,20	—	—	—	—	—	4,00	10,0	11,5	20,0	0,80	25,0
0,40	—	—	—	0,13	—	4,20	6,0	12,0	12,0	0,60	20,0
0,60	1,0	2,0	2,0	0,07	30,0	4,40	3,5	8,0	7,0	0,47	15,0
0,80	2,0	2,5	4,0	0,20	20,0	4,60	4,5	8,0	9,0	0,47	19,0
1,00	1,5	3,0	3,0	0,20	15,0	4,80	4,0	7,5	8,0	0,73	11,0
1,20	2,5	4,0	5,0	0,13	37,0	5,00	4,0	9,5	8,0	0,73	11,0
1,40	3,0	4,0	6,0	0,27	22,0	5,20	4,5	10,0	9,0	0,40	22,0
1,60	2,0	4,0	4,0	0,27	15,0	5,40	5,0	8,0	10,0	0,27	37,0
1,80	2,5	4,5	5,0	0,27	19,0	5,60	3,5	5,5	7,0	0,20	35,0
2,00	2,5	4,5	5,0	—	—	5,80	2,5	4,0	5,0	0,13	37,0
2,20	10,0	8,0	20,0	0,53	37,0	6,00	4,0	5,0	8,0	0,60	13,0
2,40	4,0	8,0	8,0	0,47	17,0	6,20	5,0	9,5	10,0	0,33	30,0
2,60	4,5	8,0	9,0	0,33	27,0	6,40	4,0	6,5	8,0	0,27	30,0
2,80	6,0	8,5	12,0	0,27	45,0	6,60	3,0	5,0	6,0	0,87	7,0
3,00	5,0	7,0	10,0	0,13	75,0	6,80	2,5	9,0	5,0	0,07	75,0
3,20	6,0	7,0	12,0	0,40	30,0	7,00	2,5	3,0	5,0	0,13	37,0
3,40	4,0	7,0	8,0	0,13	60,0	7,20	2,5	3,5	5,0	0,07	75,0
3,60	8,0	9,0	16,0	0,40	40,0	7,40	2,0	2,5	4,0	5,47	1,0
3,80	9,0	12,0	18,0	0,20	90,0	7,60	15,0	56,0	30,0	—	—

- PENETROMETRO STATICO tipo GOUDA da 5 t - (con anello allargatore) -
- COSTANTE DI TRASFORMAZIONE Ct = 20 - Velocità Avanzamento punta 2 cm/s
- punta meccanica tipo Begemann $\phi = 35.7$ mm (area punta 10 cm² - apertura 60°)
- manicotto laterale (superficie 150 cm²)



località : San Giovanni
 - note : Prova conclusa con rifiuto strumentale

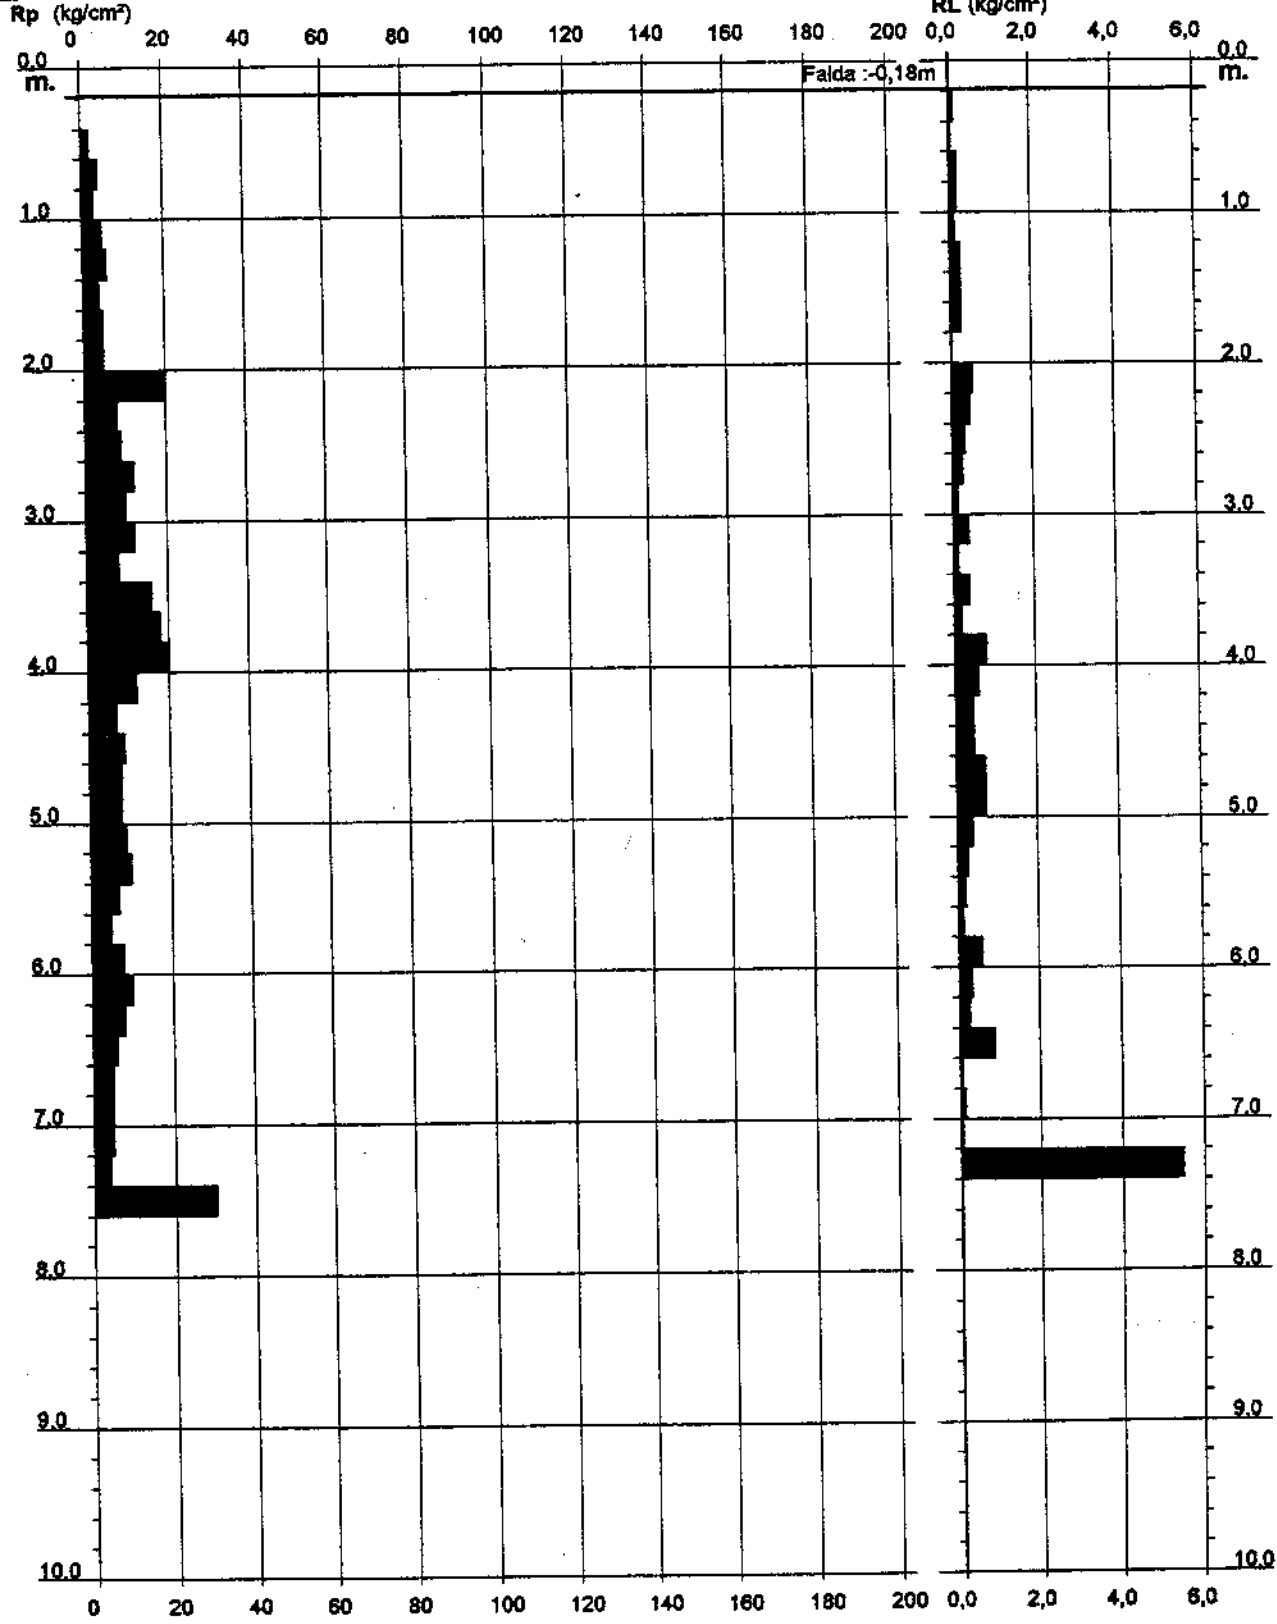